


REV	DESCRIPTION	DATE
△	RDK-96069	張馨尹 2007/07/18
△	RDK-96036	張馨尹 2007/07/18
△	RDC-99001	張馨尹 2010/11/16

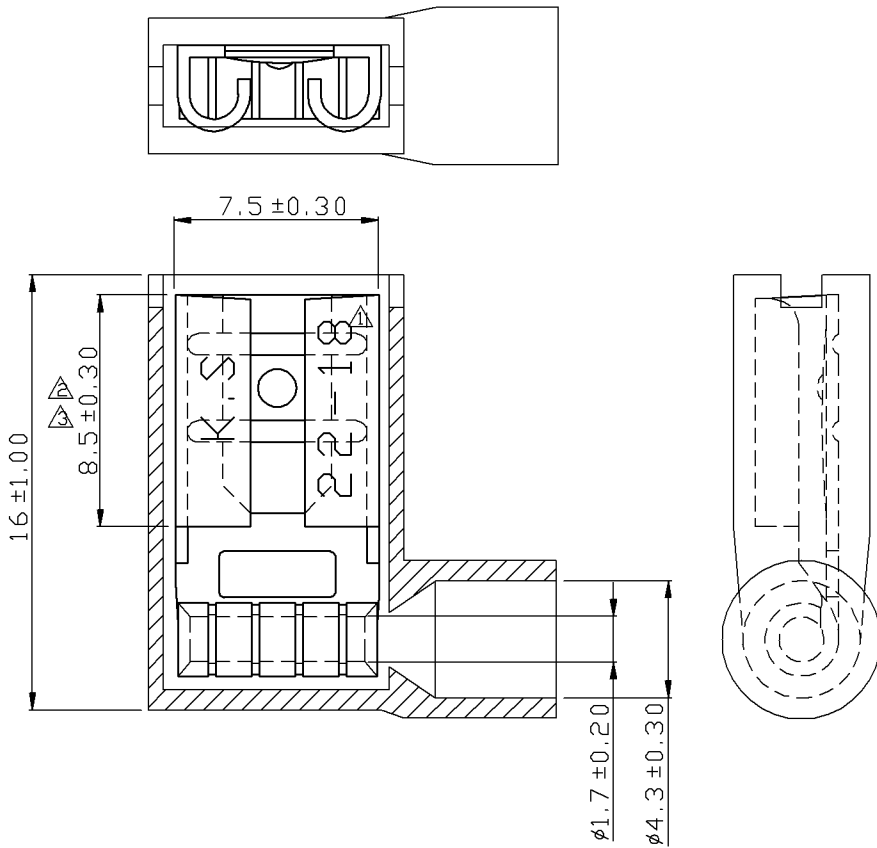

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
 2. MAXIMUM ELECTRICAL RATING : 105°C 300 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 22-18 A.W.G. (0.5-0.75 mm²)
 7. NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
 8. TERMINAL SURFACE TREATMENT : TIN PLATED
 9. TERMINAL THICKNESS : 0.45 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	NYLON-FULLY INSULATED FLAG FEMALE DISCONNECTORS (NORMAL TYPE)			UNIT	mm	
PART NO.	FLDNY1-250	MATERIAL	----	APPROVE		
NUMBER	KA-95178-C	SCALE	SHEET	PAGE	CHECKED	
DATE	2006/04/04	4/1	1-3	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.