

1 2 3 4 5 6 7 8

A

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A




- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	6	6.0	10.0	10	12.0	16.0
4	3.0	7.0	8	9.0	13.0	12	15.0	19.0

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
14	18.0	22.0	18	24.0	28.0	22	30.0	34.0
16	21.0	25.0	20	27.0	31.0	24	33.0	37.0

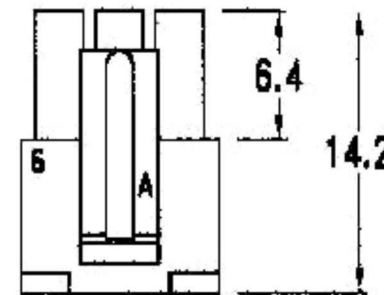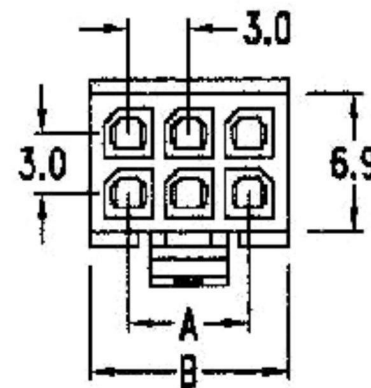

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

RoHS Compliant

Gold Star Connectors Co., Ltd.

APPD. 核准 HELEN

DWG. 製圖 ABBY

DATE 制表日 2011/08/31



SCALE 比例 參考

UNIT 單位 M M

PAGE 張數 1 OF 1



TOLERANCE 容許公差 .002 ± 0.08 (mm)

.00 ± 0.25 (mm)

.0 ± 0.4 (mm)

PART NAME 品名

Male house 3.00mm dual row

PART NO.

料號 NCHD300-xxM

1 2 3 4 5 6 7 8