




Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black
- Recommended panel thickness: 1.57mm


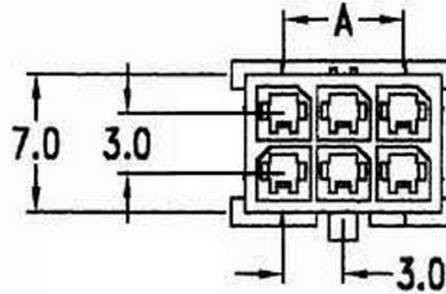


Specifications:

- Current rating:

Wire size	φ 20	φ 22	φ 24	φ 26	φ 28	φ 30
Amps	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

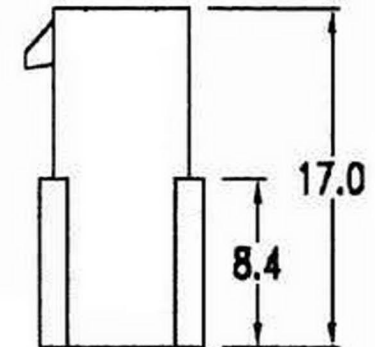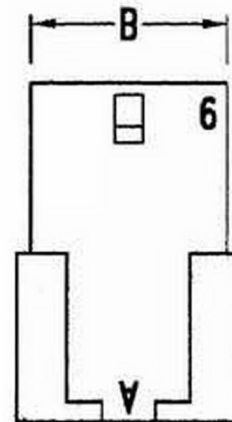

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	14	18.0	22.0
4	3.0	7.0	16	21.0	25.0
6	6.0	10.0	18	24.0	28.0
8	9.0	13.0	20	27.0	31.0
10	12.0	16.0	22	30.0	34.0
12	15.0	19.0	24	33.0	37.0

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Betty



UNLESS OTHERWISE
SPECIFIED TOLERANCE
.000 ± 0.05 (mm)
.00 ± 0.15 (mm)
.0 ± 0.25 (mm)

PART NAME 品名

DWG.
製圖 Yumi

SCALE
比例 參考

SIZE.
紙張尺寸 A 4

Female house 3.00mm dual row

DATE 制表日
2008/01/23

UNIT
單位 M M

PAGE
張數 1 OF 1

PART NO.

料號 NCHD300-xxF